


ACTIVE **BLADE** MANAGEMENT
technology

Mass Fusion Splicer Kit 41R


Smart Management

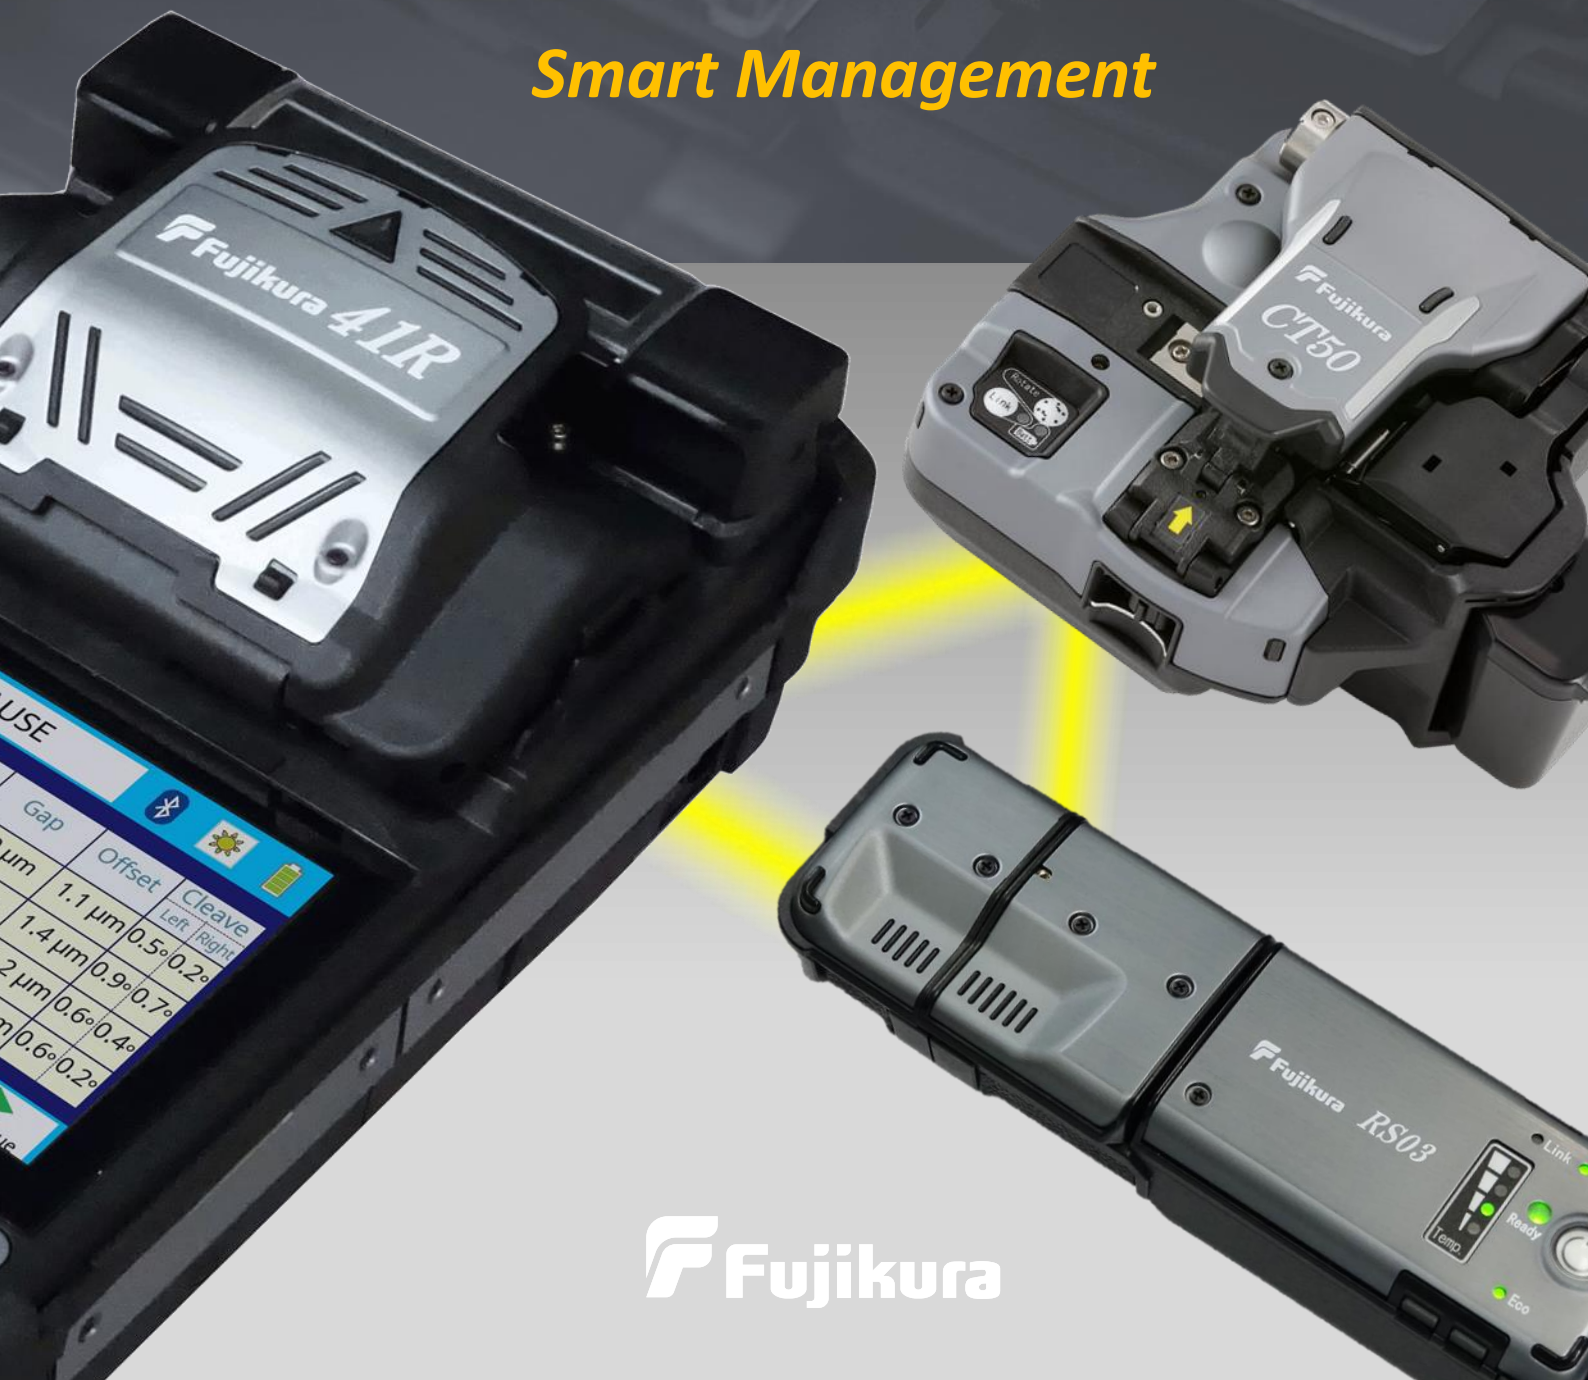

Fujikura

Mass Fusion Technology

The 41R mass fusion splicer has a wide heating area for up to 4 fibers. The wide electrode gap melts the fibers uniformly and has real-time arc discharge control by analyzing the arc's brightness intensity. The 41R does not have active core alignment mechanisms, however, during the discharge, the effects of fiber surface tension minimize preexisting offsets.

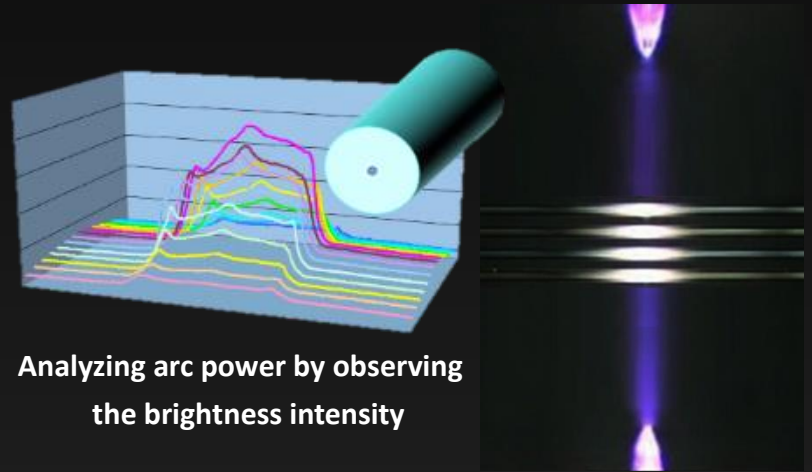


Analyzing arc power by observing the brightness intensity

Active Blade Management Technology

1. Automatic Blade Rotation

The 41R fusion splicer and CT50 fiber cleaver are enabled with wireless data connectivity. This capability allows automatic cleaver blade rotation when the splicer judges the blade is worn.

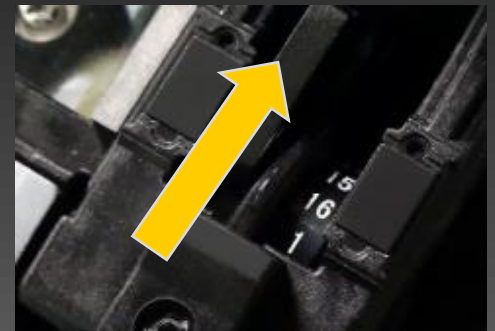

Motorized blade rotation

No.4 40mmR Large Cleave Angle

No.	Gap	Offset	Cleave	
			Left	Right
1	41 μm	0.5 μm	1.0°	1.0°
2	45 μm	0.6 μm	5.7°	0.9°
3	49 μm	0.7 μm	5.3°	0.6°
4	44 μm	0.8 μm	1.0°	0.2°

No.1 SM AUTO

Reset Continue

No.4 40mmR Large Cleave Angle

Now rotating the blade.

Blade Position: 1 → 2
Blade Height: L(1)

Reset

No.1 SM AUTO

Reset Continue

2. Blade Life Management

The 41R fusion splicer displays the remaining blade life and informs the user when a blade height change, position change, or new blade is required.

	No.1	No.2	No.3	No.4	No.5	No.6	No.7	No.8
H18	0	0	0	0	0	0	0	0
M12	0	0	0	0	0	0	0	0
L11	106	0	0	0	0	0	0	0
	No.9	No.10	No.11	No.12	No.13	No.14	No.15	No.16
H18	0	0	0	0	0	0	0	0
M12	0	0	0	0	0	0	0	0
L11	0	0	0	0	0	0	0	0

	No.1	No.2	No.3	No.4	No.5	No.6	No.7	No.8
H18	0	0	0	0	0	0	0	0
M12	0	0	0	0	0	0	0	0
L11	1014	0	1167	1522	1134	1530	1439	0
	No.9	No.10	No.11	No.12	No.13	No.14	No.15	No.16
H18	0	0	0	0	0	0	0	0
M12	0	0	0	0	0	0	0	0
L11	1185	1218	1025	1407	1338	1484	1259	1060

	No.1	No.2	No.3	No.4	No.5	No.6	No.7	No.8
H18	1041	1175	1167	1522	1134	1530	1439	1439
M12	1185	1218	1025	1407	1338	1484	1259	1439
L11	1185	1218	1025	1407	1338	1484	1259	1259
	No.9	No.10	No.11	No.12	No.13	No.14	No.15	No.16
H18	1041	1175	1167	1522	1134	1530	1439	1258
M12	1185	1218	1025	1407	1338	1484	1259	1530
L11	1185	1218	1025	1407	1338	1484	1259	1484

3. Stripping Condition Control

When the user changes the splice mode, e.g. from 4 fiber ribbon splice mode to SWR fiber splice mode, the ribbon stripper RS03 automatically changes its heating temperature and time with a wireless command from the splicer.



Heat temperature changes in accordance with Splice mode

Universal Features

1. Universal Fiber Holder


The FH-70-4 fiber holder is compatible with many types of fiber ribbon, such as 0.3mm or 0.4mm thick encapsulated ribbons and 200 μ m or 250 μ m coated Spider Web Ribbon (SWR). The 250 μ m pitch V-grooves in the FH-70-4 fiber holder simplify SWR loading and ribbon preparation.



SWR




FH-70-4

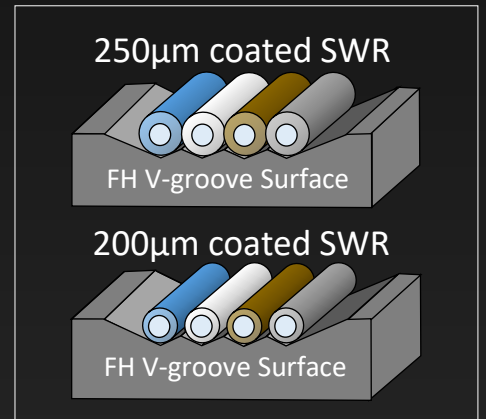

2. Universal Ribbon Stripper

The RS series ribbon strippers are compatible with 200 μ m to 400 μ m coated fibers without replacing the stripper blades.

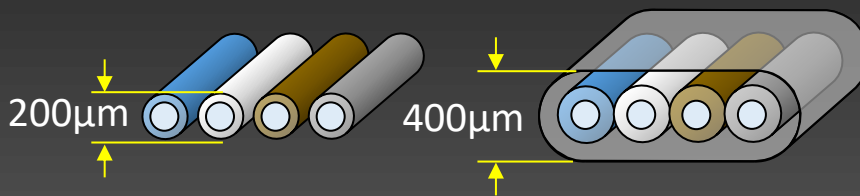


Available thickness range



RS03

3. Universal Tube Heater

The 41R mass fusion splicer can accommodate a max 6.0mm diameter heat sleeve before shrinking. As a result, it supports a wide range of protection sleeve sizes.

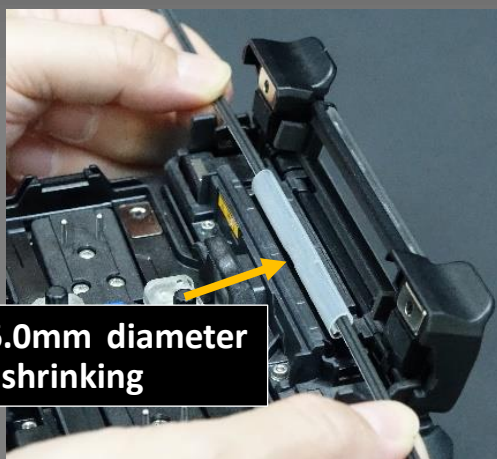


Max. 6.0mm diameter before shrinking



User Friendly


1. Simple sleeve centering

The 41R mass fusion splicer features simple sleeve positioning with its designated centering area on top of the tube heater.

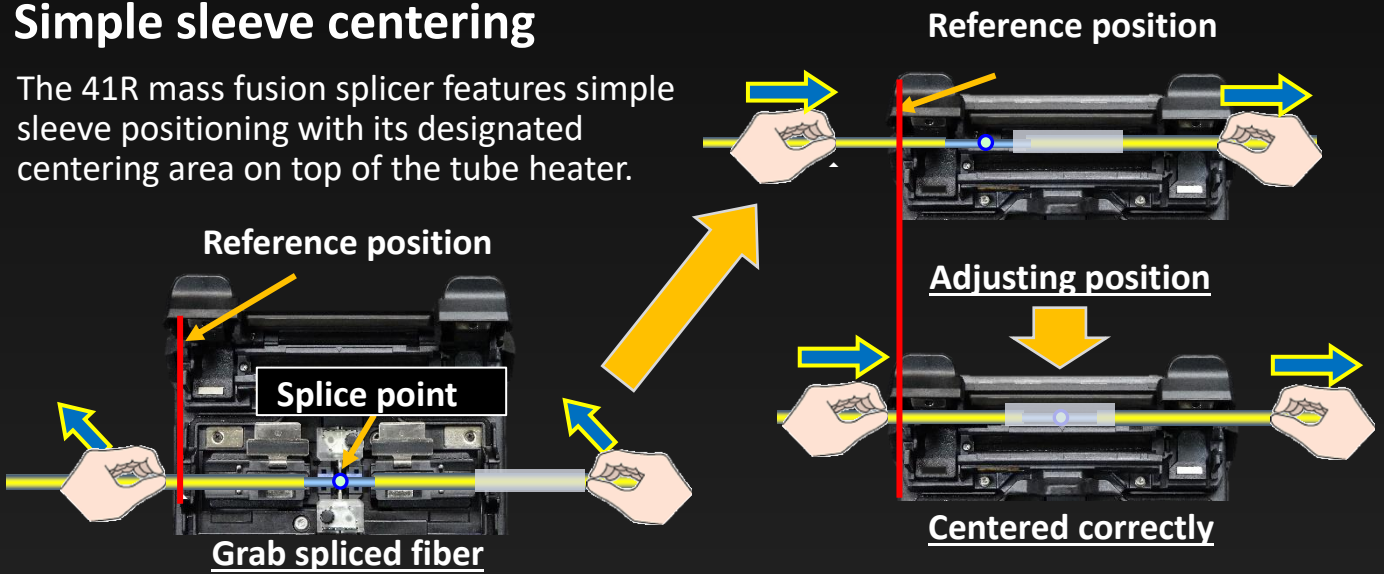


2. Easy Maintenance

The CT50 fiber cleaver has a user replaceable blade and rubber clamps - there's no need to send the device to a service center for blade or clamp replacement.

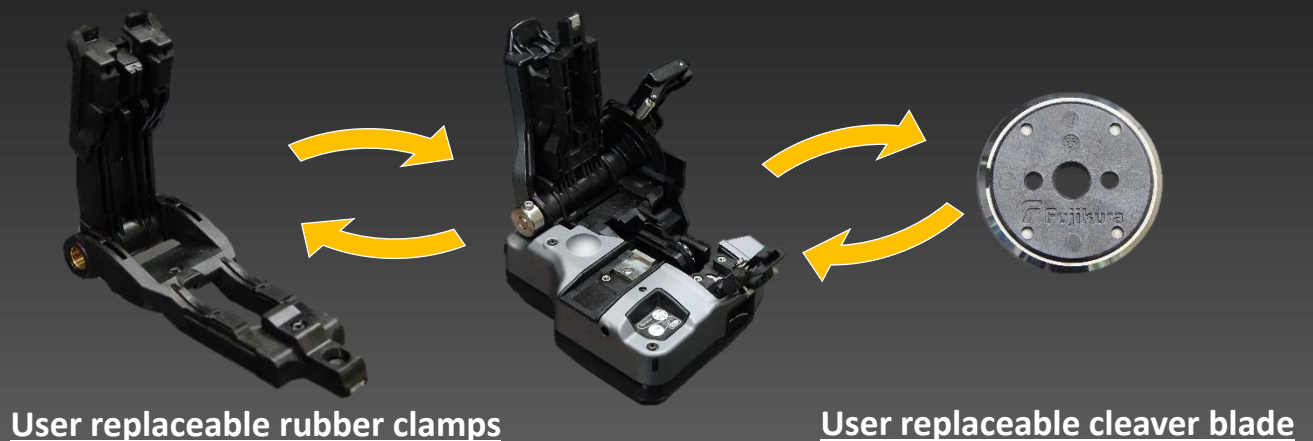

3. Lower Stripping Force

The RS series ribbon stripper has an ergonomic design and requires lower stripping force than the previous stripper.

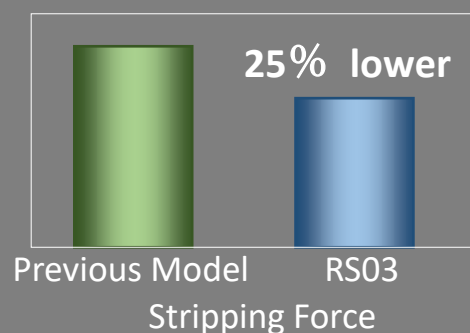


Standard Package

41R Standard package



Item	Model	Qty
Mass Fusion Splicer	41R	1 pc
(1) Battery Pack *	BTR-11A	1 pc
(2) AC Adapter	ADC-19A	1 pc
(3) AC Power Cord	ACC-08, 09, 10, 11 or 12	1 pc
(4) USB Cable	USB-01	1 pc
(5) Electrodes, for spare	ELCT2-16B	1 pair
(6) V-groove Cleaning Brush	VCB-01	1 pc
(7) Carrying Case	CC-36	1 pc
(8) Work tray	WT-08	1 pc
(9) Tripod Screw	TS-03	2 pcs
(10) Carrying Case Strap	ST-03	1 pc
(11) Alcohol Dispenser	AP-02	1 pc
(12) Quick Reference Guide	QRG-04-E or J	1 pc
Single Fiber Stripper	SS03	1 pc
Ribbon Fiber Stripper	RS03	1 pc
(1) Battery Pack *	BTR-12A	1 pc
(2) AC Adapter	ADC-09A	1 pc
(3) AC Power Cord	ACC-08, 09, 10, 11 or 12	1 pc
(4) Blade Cleaning Brush	BRS-02	1 pc
(5) Hexagonal Wrench	HEX-01	1 pc
Optical Fiber Cleaver	CT50	1 pc
(1) Fiber Scrap Collector	FDB-05	1 pc
(2) Fiber Setting Plate	AD-10-M24	1 pc
(3) Case	CC-37	1 pc
(4) Hexagonal Wrench	HEX-01	1 pc

* Please follow IATA regulation when shipping the battery by air.

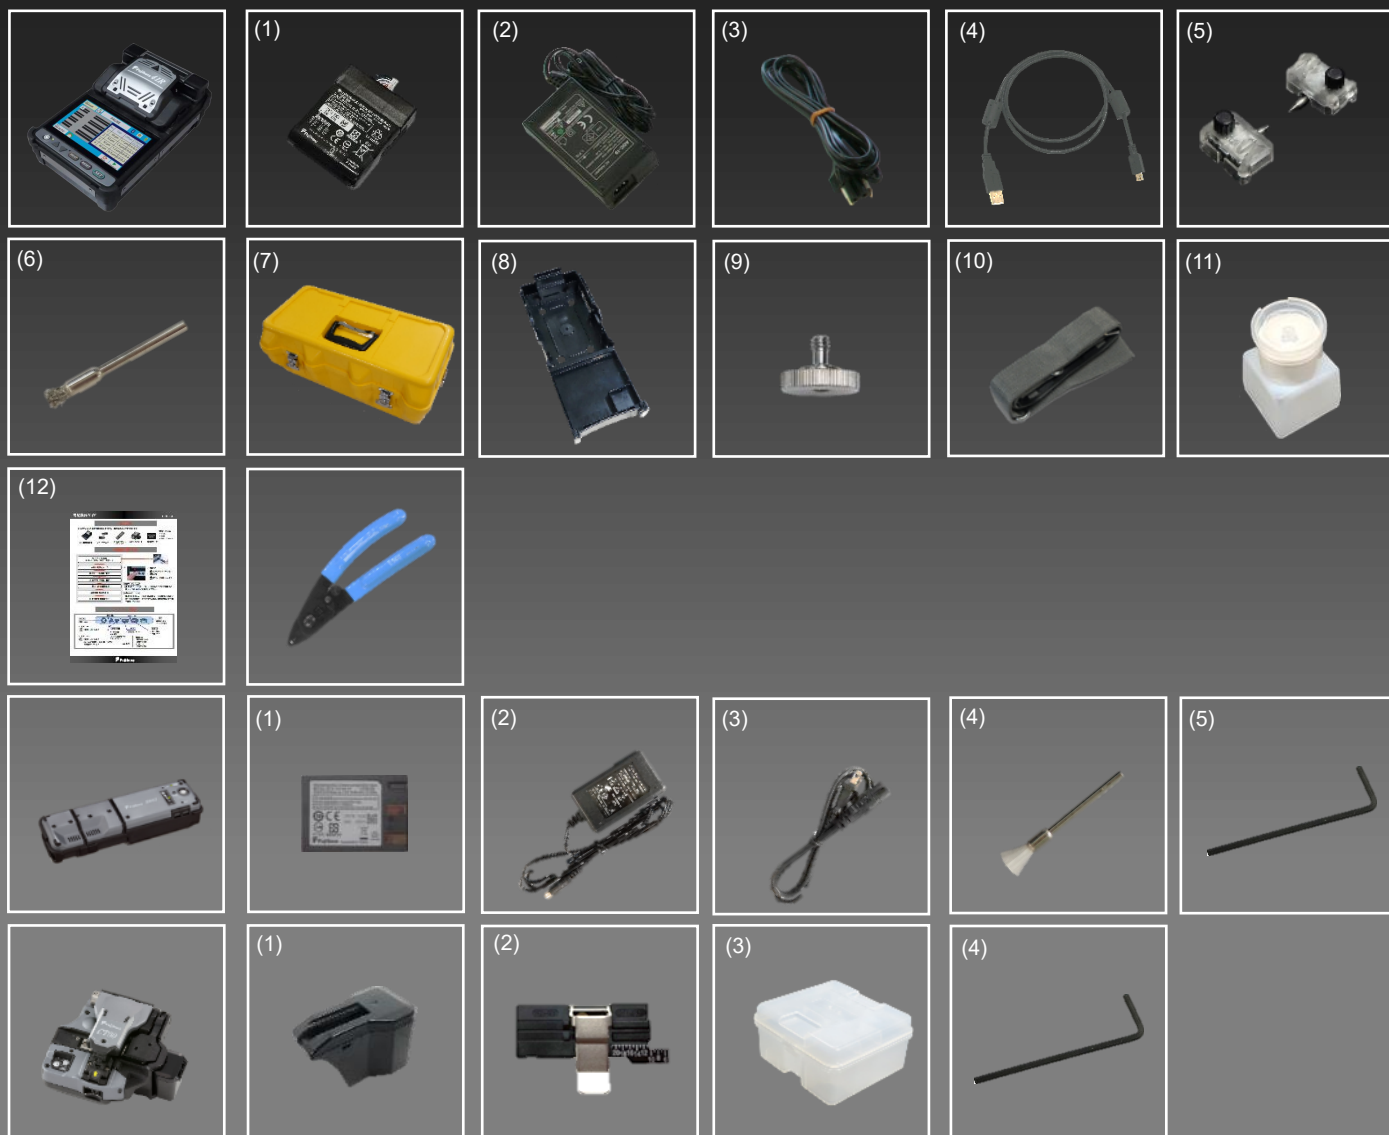

Specifications



41R Specifications

Item	Specification	
Fiber alignment method	Self cladding alignment with melting surface tension	
Fiber count can be spliced	Up to 4 fiber ribbon	
Applicable fiber	Fiber type	Single mode optical fiber Multi mode optical fiber
	Cladding dia.	Approx. 125µm
Applicable coating	Fiber holder	Coating shape : Refer to options Cleave length : 10mm
	Fiber splice performance	Splice loss *1 ITU-T G.652 : Avg. 0.05dB ITU-T G.651 : Avg. 0.02dB ITU-T G.653 : Avg. 0.08dB ITU-T G.655 : Avg. 0.08dB ITU-T G.657 : Avg. 0.05dB Splice time *2 SM FAST mode : Avg. 10 to 12sec. SM AUTO mode : Avg. 15 to 18sec.
Applicable protection sleeve	Sleeve type	Heat shrinkable sleeve
	Sleeve length	Max. 66mm
	Sleeve dia.	Max. 6.0mm before shrinking
Sleeve heat performance	Heat time *3	40mm FP-04T mode : Avg. 29 to 30sec. Single 60mm mode : Avg. 25 to 27sec.
		Fiber tensile test force
Electrode life *4	Approx. 2000 splices	
Physical description	Dimensions W	Approx. 131mm without projection
	Dimensions D	Approx. 201mm without projection
	Dimensions H	Approx. 79mm without projection
	Weight	Approx. 1.2kg including battery
Environmental condition	Temperature	Operate : -10 to 50 degreeC Storage : -40 to 80 degreeC
	Humidity	Operate : 0 to 95%RH non-condensing Storage : 0 to 95%RH non-condensing
	Altitude	Max. 3700m
AC adaptor	Input	AC100 to 240V, 50/60Hz, Max. 1.5A
	Battery pack	Type Output Capacity *5 Temperature
Display	LCD monitor	TFT 5 inches with touch screen
	Magnification	Approx. 44 to 66X
Illumination	V-grooves	LED lamp
Interface	PC	USB2.0 Mini B type
	External LED lamp	USB2.0 A type Approx. DC5V, 500mA
	Wireless *6	Bluetooth 4.1 LE
	Data storage	Splice mode Heat mode Splice result Splice image
Screw hole for tripod		1/4-20UNC
Other features	Automatic functions	Splice mode select by fiber count analysis Discharge power calibration
	Reference guide	PDF file stored in splicer
	Electrode	Replaceable without tool

41R Options

Item	Model	Remark
Fiber holder	FH-70-200	200µm coating diameter
	FH-70-250	250µm coating diameter
	FH-70-900	900µm coating diameter
	FH-70-2	2 fiber ribbon
	FH-70-4	4 fiber ribbon
	FH-FC-20	900µm in 2mm diameter jacket
	FH-FC-30	900µm in 3mm diameter jacket
	FP-60-LT900	900µm loose buffer fiber
Transfer Clamp	CLAMP-DC-12	Transferring drop cable on work tray
Protection sleeve	FP-04(T)	40mm up to 8 fiber ribbon

Notes

*1: Measured with a cut-back method relevant to ITU-T and IEC standard after splicing Fujikura identical fibers. The average splice loss changes depending on the environmental condition and fiber characteristics.

*2: Measured at room temperature. The definition of splice time is from the fiber image appeared in LCD monitor to the estimated loss displayed. The average splice time changes depending on the environmental conditions, fiber type, and fiber characteristics.

*3: Measured at room temperature with the AC adaptor. The heat time is defined from the start beep sound to the finish beep sound. The average heat time changes depending on the environmental conditions, sleeve type and battery pack condition.

*4: The electrode life changes depending on the environmental conditions, fiber type and splice modes.

*5: Test condition

- (1) Splice and heat time: 2 minutes cycle
- (2) Using the splicer power save settings
- (3) Using a not degraded battery
- (4) At room temperature

The battery capacity changes when testing with different conditions from the above.

*6: Bluetooth® mark and logos are the registered trademarks of Bluetooth SIG, Inc.

Specifications

CT50 Specifications



Item		Specifications
Applicable fiber	Fiber type	Single mode optical fiber Multi mode optical fiber
	Fiber count	Up to 16 fiber ribbon
	Cladding dia.	Approx. 125um
Applicable coating	Fiber plate	AD-10-M24 : Max. 900um coating diameter AD-50 : Max. 3mm coating diameter
	Fiber holder	Coating shape. : Refer to splicer options AD-10-M24 : 5 to 20mm *1
Cleave length	Fiber setting plate	AD-50 *CD : coating diameter CD= 250um or less : 5 to 20mm *1 250um < CD < 1000um : 10 to 20mm 1000um < CD < 3mm : 14 to 20mm
	Fiber holder	Approx. 10mm
Cleave angle *2	Single fiber	Avg. 0.3 to 0.9 degrees
	Fiber ribbon	Avg. 0.3 to 1.2 degrees
Blade life *3		Approx. 60,000 fiber cleaves
Physical description	Dimensions W	Approx. 120mm without projection *4
	Dimensions D	Approx. 95mm without projection *4
	Dimensions H	Approx. 58mm without projection *4
	Weight	Approx. 305g including battery and AD-10-M24
Environmental condition	Temperature	Operate : -10 to 50 degreeC Storage : -40 to 80 degreeC
	Humidity	Operate : 0 to 95% non-condensing Storage : 0 to 95% non-condensing
Battery		2 pieces of LR03/AAA dry battery
Wireless interface *5		Bluetooth 4.1 LE
Screw hole for tripod		1/4-20UNC
Other features	Blade rotation	Motorized rotation Manual rotation dial
	Replaceable parts	Blade
		Clamp arm

CT50 Options

Item	Model Name	Remark
Fiber Setting Plate	AD-50	Optional fiber setting plate
Blade	CB-08	Blade for replacement
Clamp Arm	ARM-CT50-01	Clamp arm with anvil for replacement
Fiber Scrap Collector	FDB-05	Spare scrap collector
Side cover	SC-CT50-01	Side cover instead of scrap collector
Spacer	SPA-CT08-10	Cleave length 10mm
	SPA-CT08-09	Cleave length 9mm
	SPA-CT08-08	Cleave length 8mm

Notes

- *1: When the cleave length is less than 10mm, the coating diameter should be 250um or less. Also, a blade height adjustment is required before cleaving. The average cleave angle is worse than the specification when the cleave length is less than 10mm.
- *2: Measured with an interferometer at room temperature, not with a splicer. A new blade was used to cleave both the single fibers and 12 fiber ribbons. The cleave length is set from 10 to 16mm. The average cleave angle changes depending on the environmental conditions, blade condition, operating method, and cleanliness.
- *3: The blade life changes depending on the environmental conditions, operating method, and the fiber type cleaved.
- *4: Measured in a condition when closing the lever.
- *5: Bluetooth® mark and logos are the registered trademarks of Bluetooth SIG, Inc.

RS03 Specifications



Item		Specifications
Applicable fiber	Fiber type	Single mode optical fiber Multi mode optical fiber
	Fiber count	Up to 16 fiber ribbon
	Cladding dia.	Approx. 125um
	Coating dia.	200 to 400um
Strip length		Max. 35mm
Heat time *1		Approx. 3sec Approx. 5sec with Eco-mode
	Heat temperature	85 to 140 degree C
Physical description	Dimensions W	Approx. 156mm without projection
	Dimensions D	Approx. 49mm without projection
	Dimensions H	Approx. 37mm without projection
	Weight	Approx. 265g including battery
Environmental condition	Temperature	Operate : -10 to 50 degreeC Storage : -40 to 80 degreeC
	Humidity	Operate : 0 to 95%RH non-condensing Storage : 0 to 95%RH non-condensing
AC adaptor	Input	AC100 to 240V, 50/60Hz, Max. 0.58A
DC adaptor	Input	DC10 to 17V, Approx. 1A
Battery	Type	Rechargeable Lithium Ion
	Output	Approx. DC7.2V / 1,840mAh
	Capacity *2	Approx. 600 times with Eco-mode
	Temperature	Recharge : 0 to 40 degreeC Storage : -20 to 30 degreeC
	Battery life *3	Approx. 500 recharge cycles
Wireless interface *4		Bluetooth 4.1 LE
Other features	Strip operation	Lower stripping force design
	Setting change	Controlled from splicer or smartphone

RS03 Options

Item	Model Name	Remark
Spacer	SPA-RS02-08	Coating length 8mm
DC power cord	DCC-11	Splicer to ribbon stripper

Notes

- *1: Measured at room temperature. The heat time changes depending on the environmental conditions and fiber coating type.
- *2: Tested at room temperature with a not degraded battery and Eco-mode. The number of cycles changes depending on the environmental conditions, stripper settings and battery condition.
- *3: The battery capacity halves after approx. 500 discharge and recharge cycles. The battery life is shortened further when using outside of the storage temperature range, operating temperature range, or if completely discharged by storing for a long time without recharging.
- *4: Bluetooth® mark and logos are the registered trademarks of Bluetooth SIG, Inc.

BEST QUALITY SERVICE
- SINCE 1978 -



Please visit our web site!

<https://www.fusionsplicer.fujikura.com>

Fujikura Ltd.

1-5-1, Kiba, Koto-ku, Tokyo 135-8512, Japan
General inquiries : +81-3-5606-1164
Service & support : +81-43-484-3962 <https://www.fujikura.com>

Fujikura Asia Ltd.

438A Alexandra Road, Block A Alexandra Technopark #08-03 Singapore 119967
General inquiries, Service & support : +65-6-278-8955
<https://www.fujikura.com.sg>

Fujikura Europe Ltd.

C51 Barwell Business Park, Leatherhead Road, Chessington, Surrey KT9 2NY,
General inquiries : +44-20-8240-2000
Service & support : +44-20-8240-2020 <https://www.fujikura.co.uk>

AFL

260, Parkway East, Duncan, SC29334, USA
General inquiries : +1-800-235-3423
Service & support : +1-800-866-3602 <https://www.afglobal.com>

Fujikura (China) Co., Ltd.

7th Floor, Shanghai Hang Seng Bank Tower, 1000 Lujiuzi Ring Road, Pudong New Area, Shanghai 200120, CHINA
General inquiries, service & support : +86-21-6841-3636 <http://www.fujikura.com.cn>