CT-02

Stapler Fibre Cleaver System

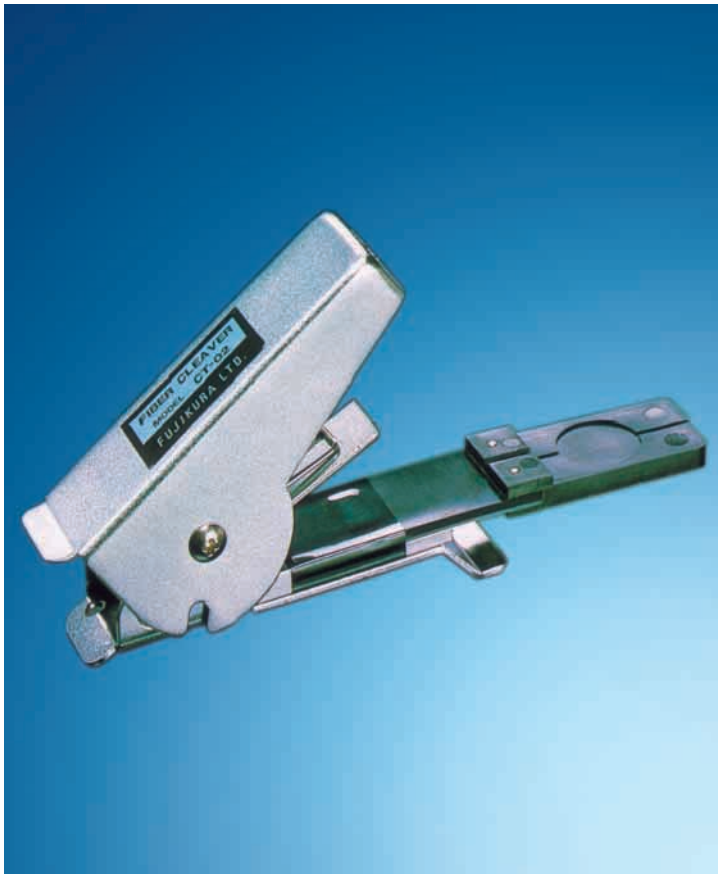

Features

- Hand-held, stapler-style
- Flat, perpendicular, mirror-like end face
- Compact, lightweight and easy to use

Fujikura
EUROPE LTD

[e] sales@fujikura.co.uk www.fujikura.co.uk

Fujikura Europe Ltd

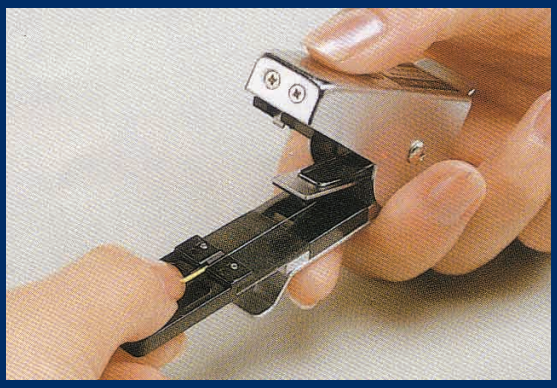

Setting the prepared bare fibre end between the fibre clamp and the leaf spring.

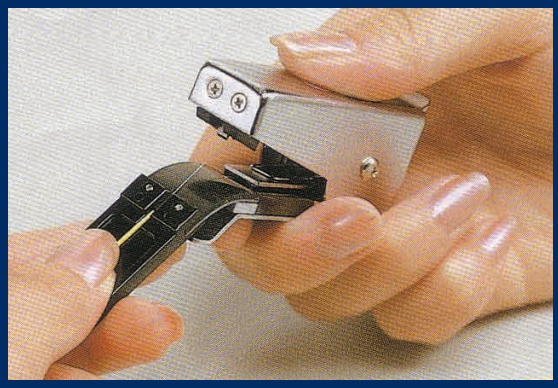

Bending the leaf spring to break the fibre end.

Specifications

Fibre :	Silica fibre
Cladding Diameter :	125µm nominal
Clamping :	Manual clamp
Jacket Diameter :	0.2-1.0mm
Designated Bare Fibre Length :	16mm
Dimensions :	20W x 35H x 100D (mm)
Weight :	75g
Expected Times of Cleaves :	1,000
Accessory :	Case

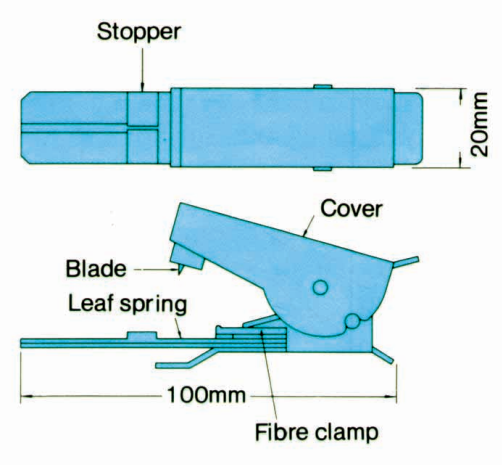

SPECIFICATIONS AND DESCRIPTIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

Fibre Optics and Microelectronic Products, Technical Service and Support Divisions
C51 Barwell Business Park Leatherhead Road Chessington Surrey KT9 2NY England
[t] +44 (0) 20 8240 2060 **[f]** +44 (0) 20 8240 2010

Training Division
Brook Lane Westbury Wiltshire BA13 4ES England
[t] +44 (0) 1373 825 582 **[f]** +44 (0) 1373 825 824

JAN 04